


# Choosing the I/O Type

## Analog CPU Modules

The Analog CLICK CPU modules are available with different combinations of DC in, DC sinking, sourcing or relay out, and analog in and out.

They also have an RS-485 port for Modbus and ASCII communications, and the battery backup feature which will retain the data in SRAM for 5 years (battery sold separately; part no. D2-BAT-1).

The table lists the part numbers showing the various I/O type combinations.

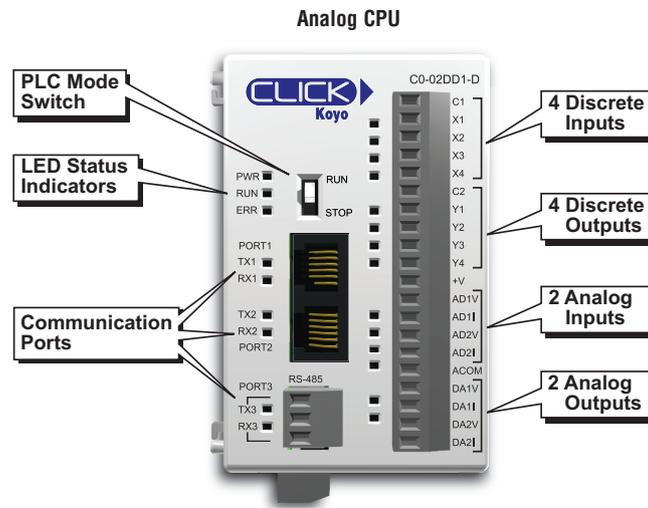


Analog CLICK CPUs					
Part Number	Discrete Input Types	Discrete Output Types	Analog Input Types	Analog Output Types	External Power
<i>CO-02DD1-D</i>	4 DC (sink/source)	4 DC (sink)	2 channel; voltage (0-5 VDC) / current (4-20 mA); selectable separately per channel; 12 bit	2 channel; voltage (0-5 VDC) / current (4-20 mA); selectable separately per channel; 12 bit	24 VDC (required for all CPUs)
<i>CO-02DD2-D</i>		4 DC (source)			
<i>CO-02DR-D</i>		4 relay			

## I/O Modules

A variety of discrete, combo, and analog I/O modules are available for the CLICK PLC system. Up to eight I/O modules can be connected to a CLICK CPU module to expand the system I/O count and meet the needs of a specific application. Complete I/O module specifications and wiring diagrams can be found later in this section.

## Discrete Input Modules

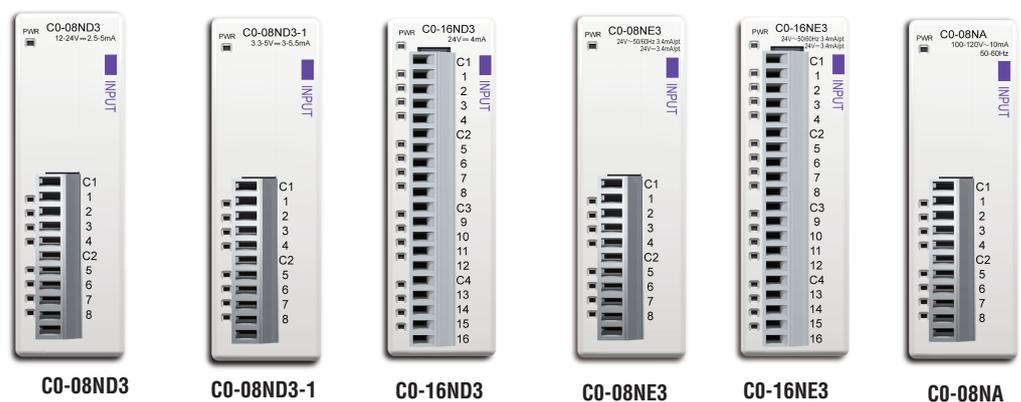


Discrete Input Modules			
Part Number	I/O Type/ Number/Commons	Sink or Source	Voltage Ratings
<i>CO-08ND3</i>	DC/8/2	Sink or Source	12-24 VDC
<i>CO-08ND3-1</i>	DC/8/2	Sink or Source	3.3-5 VDC
<i>CO-16ND3</i>	DC/16/4	Sink or Source	24 VDC
<i>CO-08NE3</i>	AC/DC / 8/2	Sink or Source	24 VAC/VDC
<i>CO-16NE3</i>	AC/DC / 16/4	Sink or Source	24 VAC/VDC
<i>CO-08NA</i>	AC/8/2	N/A	100-120 VAC

# Choosing the I/O Type


## Discrete I/O Modules (continued)

### Discrete Output Modules

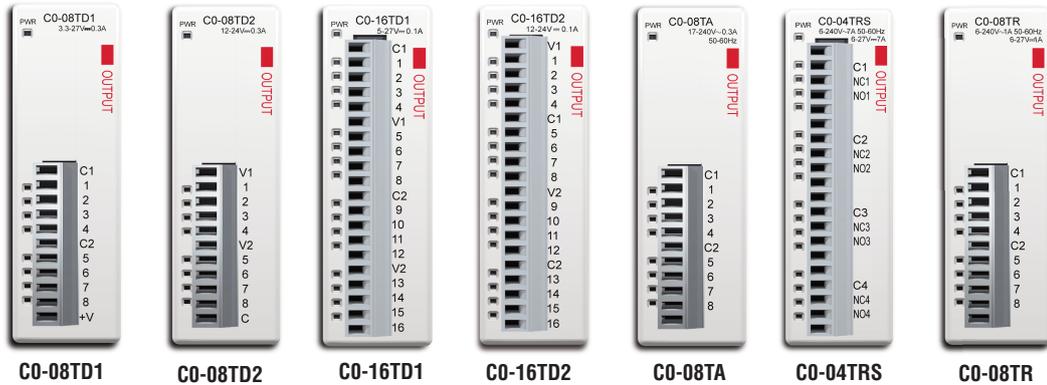

Discrete Output Modules			
Part Number	I/O Type/ Number/ Commons	Sink or Source	Voltage/Current Ratings
<b>CO-08TD1</b>	DC/8/2	Sink	3.3-27 VDC, 0.3 A
<b>CO-08TD2</b>	DC/8/1	Source	12-24 VDC, 0.3 A
<b>CO-16TD1</b>	DC/16/2	Sink	5-27 VDC, 0.1 A
<b>CO-16TD2</b>	DC/16/2	Source	12-24 VDC, 0.1 A
<b>CO-08TA</b>	AC/8/2	N/A	17-240 VAC, 0.3 A
<b>CO-04TRS</b>	Relay/4/4	N/A	6-27 VDC, 7 A 6-240 VAC, 7 A
<b>CO-08TR</b>	Relay/8/2	N/A	6-27 VDC, 1 A 6-240 VAC, 1 A

### Discrete Combo I/O Modules

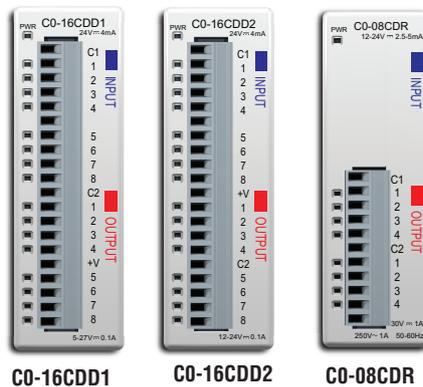

Discrete Combo I/O Modules				
Part Number	Input Type	Input Voltage	Output Type	Output Voltage / Current Ratings
<b>CO-16CDD1</b>	8 DC (source/sink)	24 VDC	8 DC (sink)	5-27 VDC / 0.1 A
<b>CO-16CDD2</b>	8 DC (source/sink)	24 VDC	8 DC (source)	12-24 VDC / 0.1 A
<b>CO-08CDR</b>	4 DC (source/sink)	12-24 VDC	4 (relay)	6.25-24 VDC, 1 A 6-240 VAC, 1 A

Field I/O

Software

C-more &amp; other HMI

Drives

Soft Starters

Motors &amp; Gearbox

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

Terminal Blocks &amp; Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Appendix


Product Index

Part # Index

# Choosing the I/O Type


## Analog I/O Modules

### Analog Input Modules

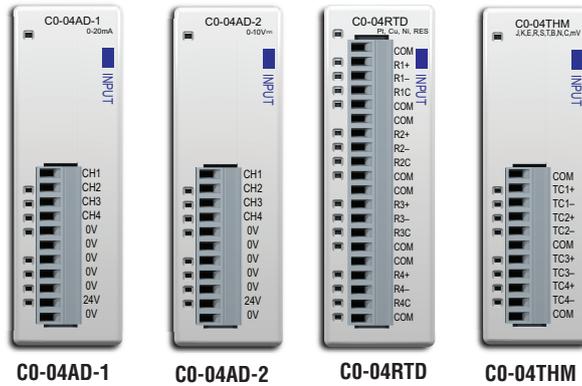

Analog Input Modules		
Part Number	Analog Input Types	External Power Required
<b>CO-04AD-1</b>	4 channel, current (0-20 mA), 13 bit	24 VDC
<b>CO-04AD-2</b>	4 channel, voltage (0-10 V), 13 bit	24 VDC
<b>CO-04RTD</b>	4 channel RTD input (0.1 degree °C/°F resolution), or resistive input (0 to 3125 ohms)	None
<b>CO-04THM</b>	4 channel thermocouple input (0.1 degree °C/°F resolution), or voltage input (-156.25 mV to 1.25 V), 16 bit	None

### Analog Output Modules

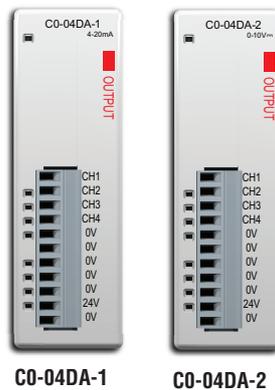


Analog Output Modules		
Part Number	Analog Output Types	External Power Required
<b>CO-04DA-1</b>	4 channel, current sourcing (4-20 mA), 12 bit	24 VDC
<b>CO-04DA-2</b>	4 channel, voltage (0-10 V), 12 bit	24 VDC

# Choosing the I/O Type / Specifications

## Analog I/O Modules (continued)

### Analog Combo I/O Modules

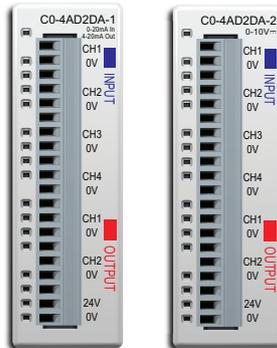

C0-4AD2DA-1

C0-4AD2DA-2

Analog Combo I/O Modules			
Part Number	Analog Input Type	Analog Output Type	External Power Required
<b>C0-4AD2DA-1</b>	4 channel, current (0-20 mA), 13 bit	2 channel, current sourcing (4-20 mA), 12 bit	24 VDC
<b>C0-4AD2DA-2</b>	4 channel, voltage (0-10 V), 13 bit	4 channel, voltage (0-10 V), 12 bit	24 VDC

## General Specifications For All CLICK PLC Products

These general specifications apply to all CLICK CPUs, optional I/O modules, and optional power supply products. Please refer to the appropriate I/O temperature derating charts under both the CPU and I/O module specifications to determine best operating conditions based on the ambient temperature of your particular application.

General Specifications	
<b>Power Input Voltage Range</b>	20-28 VDC
<b>Maximum Power Consumption</b>	5 W (No 5 V use from communication port)
<b>Maximum Inrush Current</b>	30 A (less than 1ms)
<b>Acceptable External Power Drop</b>	Max 10 ms
<b>Operating Temperature</b>	Analog, analog combo I/O modules only: 32°F to 140°F (0°C to 60°C); All other modules: 32°F to 131°F (0°C to 55°C), IEC 60068-2-14 (Test Nb, Thermal Shock)
<b>Storage Temperature</b>	-4°F to 158°F (-20°C to 70°C) IEC 60068-2-1 (Test Ab, Cold) IEC 60068-2-2 (Test Bb, Dry Heat) IEC 60068-2-14 (Test Na, Thermal Shock)
<b>Ambient Humidity</b>	30% to 95% relative humidity (non-condensing)
<b>Environmental Air</b>	No corrosive gases. Environmental pollution level is 2 (UL840)
<b>Vibration</b>	MIL STD 810C, Method 514.2, EC60068-2-6 JIS C60068-2-6 (Sine wave vibration test)
<b>Shock</b>	MIL STD 810C, Method 516.2, IEC60068-2-27, JIS C60068-2-27
<b>Noise Immunity</b>	Comply with NEMA ICS3-304, Impulse noise 1 $\mu$ s, 1000V EN61000-4-2 (ESD), EN61000-4-3 (RFI), EN61000-4-4 (FTB) EN61000-4-5 (Surge), EN61000-4-6 (Conducted) EN61000-4-8 (Power frequency magnetic field immunity) RFI: No interference measured at 150 and 450 MHz (5w/15cm)
<b>Emissions</b>	EN55011:1998 Class A
<b>Agency Approvals</b>	UL508 (File No. E157382, E316037); CE (EN61131-2)
<b>Other</b>	RoHS

# Power Budgeting

## Power Budgeting

There are two areas to be considered when determining the power required to operate a CLICK PLC system. The first area is the power required by the CLICK CPU, along with the internal logic side power that the CPU provides to its own I/O and any connected I/O modules that are powered through the CPU's expansion port; plus any device, such as a C-more Micro-Graphic panel, that is powered through one of the CPU's communication ports.

The second area is the power required by all externally connected I/O devices. This should be viewed as the field side power required. The field side power is dependent on the voltage used for a particular input or output device as it relates to the wired I/O point, and the calculated load rating of the connected device.

It is strongly recommended that the power source for the logic side be separate from the power source for the field side to help eliminate possible electrical noise.

Power budgeting requires the calculation of the total current that the 24 VDC power source needs to provide to CLICK's logic side, and also a separate calculation of the total current required for all devices operating from the field side of the PLC system.

See the Power Budgeting Example shown to the right. The table shows current requirements for a CLICK CPU, two I/O modules, and a C-more Micro. Use the total amperage values to select a proper sized power supply.

### Power Budgeting Using the CLICK Programming Software

The CLICK Programming software can also be used for power budgeting. Based on the amperage rating of the power supply selected in the first column, your power budget is calculated by subtracting each consecutive module's power consumption from the total available power budget. If you exceed the maximum allowable power consumption the power budget row is highlighted in red.



**CLICK 24 VDC Power Supply**  
CO-00AC or CO-01AC



**Other 24 VDC Power Supply**  
Example: PSP24-60S

CPU Current Consumption (mA)		
Part Number	Power Budget 24 VDC (logic side)	External 24 VDC (field side)
<b>Basic CPU Modules</b>		
CO-00DD1-D	120	60
CO-00DD2-D	120	0
CO-00DR-D	120	0
CO-00AR-D	120	0
<b>Standard CPU Modules</b>		
CO-01DD1-D	140	60
CO-01DD2-D	140	0
CO-01DR-D	140	0
CO-01AR-D	140	0
<b>Analog CPU Modules</b>		
CO-02DD1-D	140	60
CO-02DD2-D	140	0
CO-02DR-D	140	0


I/O Module Current Consumption (mA)		
Part Number	Power Budget 24 VDC (logic side)	External 24 VDC (field side)
<b>Discrete Input Modules</b>		
CO-08ND3	30	0
CO-08ND3-1	30	0
CO-16ND3	40	0
CO-08NE3	30	0
CO-16NE3	40	0
CO-08NA	30	0
<b>Discrete Output Modules</b>		
CO-08TD1	50	15
CO-08TD2	50	0
CO-16TD1	80	100
CO-16TD2	80	0
CO-08TA	80	0
CO-04TRS	100	0
CO-08TR	100	0

I/O Module Current Consumption (continued) (mA)		
Part Number	Power Budget 24 VDC (logic side)	External 24 VDC (field side)
<b>Discrete Combo I/O Modules</b>		
CO-16CDD1	80	50
CO-16CDD2	80	0
CO-08CDR	80	0
<b>Analog Input Modules</b>		
CO-04AD-1	20	65
CO-04AD-2	23	65
CO-04RTD	25	0
CO-04THM	25	0
<b>Analog Output Modules</b>		
CO-04DA-1	20	145
CO-04DA-2	20	85
<b>Analog Combo I/O Modules</b>		
CO-4AD2DA-1	25	75
CO-4AD2DA-2	20	65
<b>C-more Micro-Graphic Panel</b>		
Monochrome only	90	0


### Power Budgeting Example

Current Consumption (mA) Example		
Part Number	Power Budget 24 VDC (logic side)	External 24 VDC (field side)
CO-00DD1-D	120	60
CO-16ND3	40	0
CO-16TD1	80	100
C-more Micro	90	0
<b>Total:</b>	<b>330</b>	<b>160 *</b>

\* Plus calculated load of connected I/O devices.

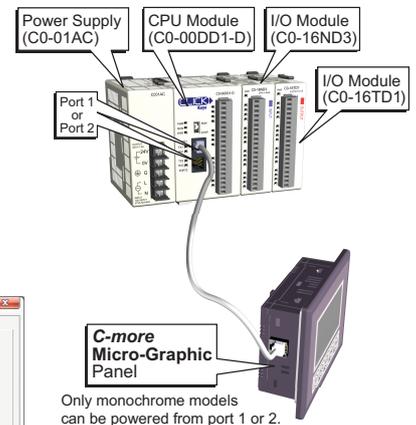

Only monochrome models can be powered from port 1 or 2.

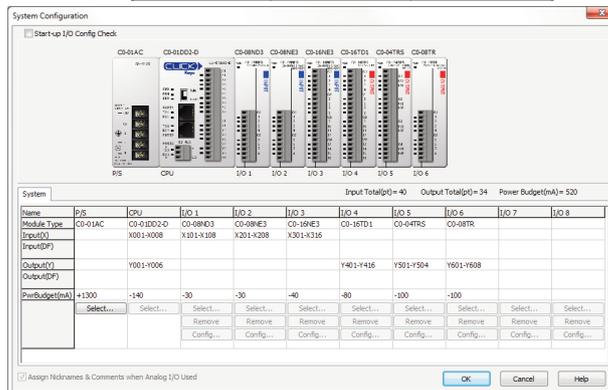

## Wiring Solutions using the ZIPLink Wiring System

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks.

ZIPLinks are available in a variety of styles to suit your needs, including feedthrough connector module. ZIPLinks are available for all Basic and Standard CLICK CPU modules and most discrete and analog I/O modules. Pre-printed I/O-specific adhesive label strips for quick marking of ZIPLink modules are provided with ZIPLink cables.



### Solution 1: CLICK CPU and I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a ZIPLink connector module used in conjunction with a prewired ZIPLink cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

Using the PLC CPU and I/O Modules to ZIPLink Connector Modules selector tables located in this section,

1. Locate your CPU or I/O module.
2. Select a ZIPLink Module.
3. Select a corresponding ZIPLink Cable.

### Solution 2: CLICK CPU and I/O Modules to 3rd Party Devices

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the ZIPLink Pigtail Cables. ZIPLink Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.

Using the I/O Modules to 3rd Party Devices selector tables located in the ZIPLink section,

1. Locate your CPU or I/O module.
2. Select a ZIPLink Pigtail Cable that is compatible with your 3rd party device.



### Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a ZIPLink communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in the ZIPLink section,

1. Locate your Drive and type of communications.
2. Select a ZIPLink cable and other associated hardware.



### Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with CLICK CPUs that can also be used with other communications devices. Connections include a 6-pin RJ12 connector which can be used in conjunction with the RJ12 Feedthrough module.

Using the Serial Communications Cables selector table located in the ZIPLink section,


1. Locate your connector type
2. Select a cable.




# Basic CPU Module Specifications

C0-00DD1-D <--->


8 DC Input/6 Sinking DC Output Micro PLC

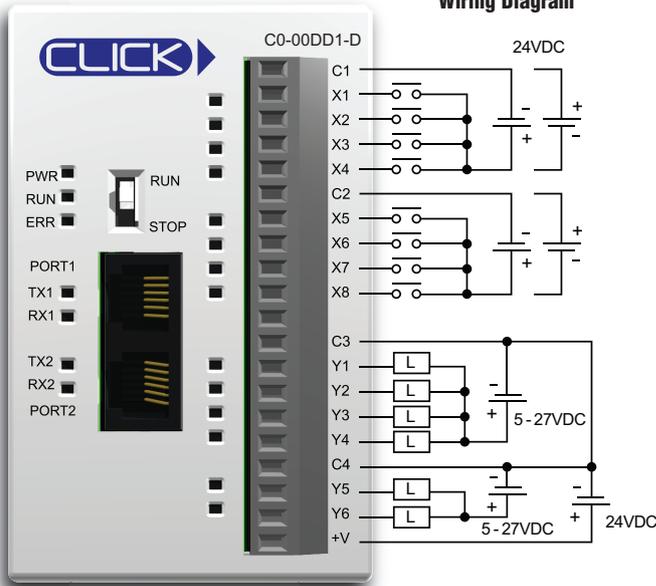

Equivalent Input Circuit

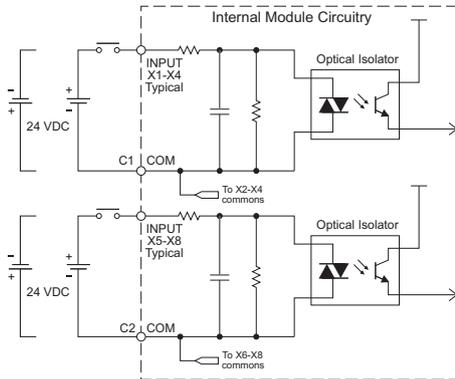

Equivalent Output Circuit

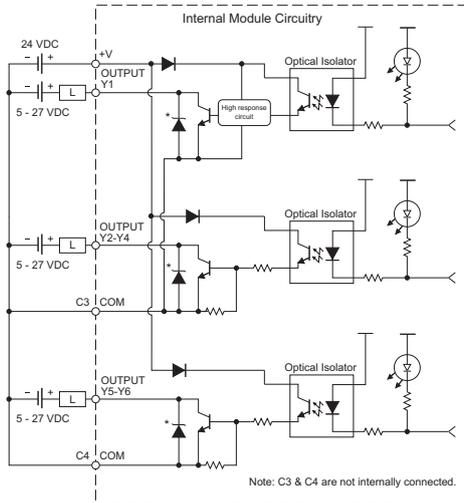

\* Zener Diode Power Dissipation: 200 mW

## C0-00DD1-D Built-in I/O Specifications - Inputs

<b>Inputs per Module</b>	8 (Sink/Source)
<b>Operating Voltage Range</b>	24 VDC
<b>Input Voltage Range</b>	21.6 - 26.4 VDC
<b>Input Current</b>	X1-2: Typ 5 mA @ 24 VDC X3-8: Typ 4 mA @ 24 VDC
<b>Maximum Input Current</b>	X1-2: 6.0 mA @ 26.4 VDC X3-8: 5.0 mA @ 26.4 VDC
<b>Input Impedance</b>	X1-2: 4.7 kΩ @ 24 VDC X3-8: 6.8 kΩ @ 24 VDC
<b>ON Voltage Level</b>	X1-2: > 19 VDC X3-8: > 19 VDC
<b>OFF Voltage Level</b>	X1-2: < 4 VDC X3-8: < 7 VDC
<b>Minimum ON Current</b>	X1-2: 4.5 mA X3-8: 3.5 mA
<b>Maximum OFF Current</b>	X1-2: 0.1 mA X3-8: 0.5 mA
<b>OFF to ON Response</b>	X1-2: Typ 5 μs Max 20 μs X3-8: Typ 2 ms Max 10 ms
<b>ON to OFF Response</b>	X1-2: Typ 5 μs Max 20 μs X3-8: Typ 3 ms Max 10 ms
<b>Status Indicators</b>	Logic Side (8 points, green LED)
<b>Commons</b>	2 (4 points/common) Isolated


## C0-00DD1-D Built-in I/O Specifications - Outputs

<b>Outputs per Module</b>	6 (Sink)
<b>Operating Voltage Range</b>	5-27 VDC
<b>Output Voltage Range</b>	4-30 VDC
<b>Maximum Output Current</b>	0.1 A/point; C3: 0.4 A/common, C4: 0.2 A/common
<b>Minimum Output Current</b>	0.2 mA
<b>Maximum Leakage Current</b>	0.1 mA @ 30.0 VDC
<b>On Voltage Drop</b>	0.5 VDC @ 0.1 A
<b>Maximum Inrush Current</b>	150 mA for 10 ms
<b>OFF to ON Response</b>	Y1: typ 5 μs; max 20 μs Y2-6: < 0.5 ms
<b>ON to OFF Response</b>	Y1: typ 5 μs; max 20 μs Y2-6: < 0.5 ms
<b>Status Indicators</b>	Logic Side (6 points, red LED)
<b>Commons</b>	2 (4 points/com & 2 points/com) Isolated
<b>External DC Power Required</b>	20-28 VDC Maximum @ 60 mA (All Points On)

## General Specifications

<b>Current Consumption at 24VDC</b>	120 mA
<b>Terminal Block Replacement Part No.</b>	C0-16TB
<b>Weight</b>	5.0 oz (140 g)

C0-00DD1-D Temperature Derating Chart

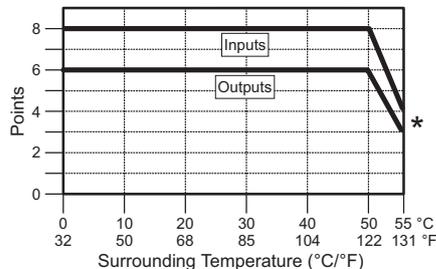

ZipLink Pre-Wired PLC  
Connection Cables and Modules



ZL-RTB20 20-pin feed-through connector module

20-pin connector cable  
ZL-C0-CBL20 (0.5 m length)  
ZL-C0-CBL20-1 (1.0 m length)  
ZL-C0-CBL20-2 (2.0 m length)