

Illuminated Pushbuttons - Ø22 mm - IP66

Flush Double Pushbutton¹⁾²⁾


Illustrative image	Frontal part	Color	Engraving	Reference	Code	Weight (kg)
	Flush		Green	I	CSW2-BDFI2110 WH	12756258
	Flush		Red	O		
	Flush		Green	START	CSW2-BDFI21SS WH	12904803
	Flush		Red	STOP		
	Flush		Green	Without engraved	CSW2-BDFI21 WH	12904818
	Flush		Red	Without engraved		
	Flush		White	I	CSW2-BDFI0510 WH	12904819
	Flush		Black	O		
	Flush		White	START	CSW2-BDFI05SS WH	12904822
	Flush		Black	STOP		
	Flush		White	Without engraved	CSW2-BDFI05 WH	12904824
	Flush		Black	Without engraved		
	Flush		Black	+	CSW2-BDFI55PN WH	12904825
	Flush		Black	-		
	Flush		Black	↑	CSW2-BDFI55FR WH	12904827
	Flush		Black	↓		

Extended Double Pushbutton¹⁾²⁾

Illustrative image	Frontal part	Color	Engraving	Reference	Code	Weight (kg)
	Flush		Green	I	CSW2-BDSI2110 WH	12904828
	Extended		Red	O		
	Flush		Green	START	CSW2-BDSI21SS WH	12904831
	Extended		Red	STOP		
	Flush		Green	Without engraved	CSW2-BDSI21 WH	12904834
	Extended		Red	Without engraved		
	Flush		White	I	CSW2-BDSI0510 WH	12904837
	Extended		Black	O		
	Flush		White	START	CSW2-BDSI05SS WH	12904848
	Extended		Black	STOP		

How to order³⁾

- Head
- + Flange
- + Contact block
- + Illumination block

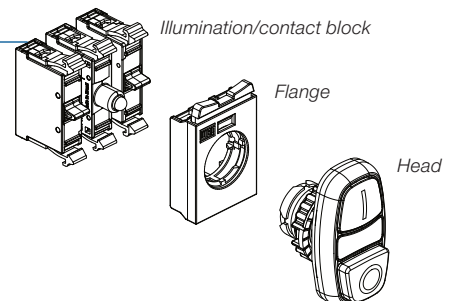

Notes: 1) Does not allow the use of contact blocks in the central position of the mounting flanges;

2) It allows the use of illumination contact block in the center of the flange;

3) Check the maximum of recommended blocks for each head on page G-46.