

MSB108025G

IP66 STEEL WALL-MOUNTING ENCLOSURE 1000HX800WX250MM



FEATURES

- Compact surface wall-mounting enclosure
- Single door
- 5-mm double-bit lock
- Coated with hardened polyester powder coat, textured 80-120 µ. with UV protection
- IP66 Rating

SPECIFICATIONS


Part No	MSB1008025G
Degree of protection	IP66/NEMA 1,12,4
Resistance to impact	IK10
Ambient temperature range	-25 °C / +40 °C
Maximum operating voltage	1000 V AC
Corrosion resistance	C4-M
Maximum temperature for sealing gasket	80°C
Maximum temperature for polyester paint	125°C
Mounting type	Wall mounting
Mounting plate	2mm galvanised sheet
Colour	RAL7035 grey
Materials	Cold-rolled steel EN10130+A1, Injected polyurethane sealing gasket
Installation	Surface
Type of door	Single plain door
Locking	5-mm double-bit lock -3-points locking
No. of locks	3point
No. of hinges	3
Door reinforcement profiles	2
Cable entry	Gland plate at bottom
Sheet thickness Body	1.5mm
Sheet thickness Door	2mm
Inside usable space	(Height x Width x Depth) 950x750x229 mm
Wall fixing	(Height x Width) 960x760 mm
Standards	UNE-EN 62208 / UNE-EN 61439-1-3 (as applicable)
Certificates	UL508A / Bureau Veritas



* Picture only for representation purposes.

MSB108025G

MSB1008025G

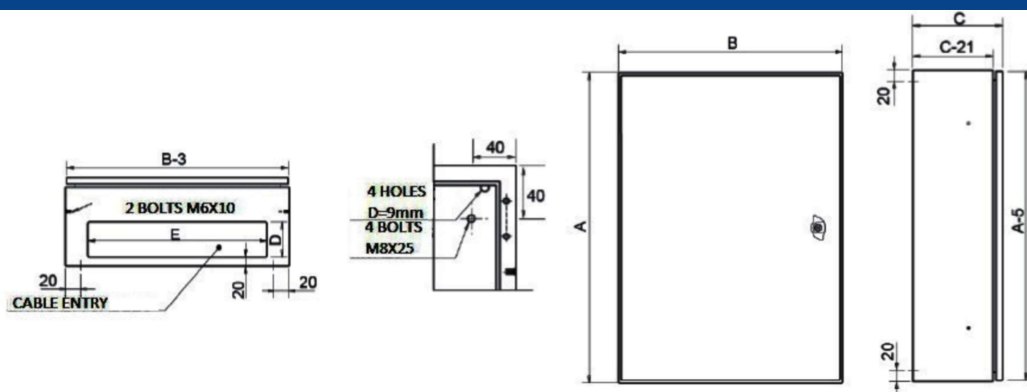

A mm	B mm	C mm	D mm	E mm
1000	800	250	140	700