

## MSB606020G

### IP66 STEEL WALL-MOUNTING ENCLOSURE 600HX600WX200MM



#### FEATURES

- Compact surface wall-mounting enclosure
- Single door
- 5-mm double-bit lock
- Coated with hardened polyester powder coat, textured 80-120 µ. with UV protection
- IP66 Rating

#### SPECIFICATIONS


|   |  |
|---|--|
| Part No                                 | MSB606020G   |
| Degree of protection                    | IP66/NEMA 1,12,4   |
| Resistance to impact                    | IK10   |
| Ambient temperature range               | -25 °C / +40 °C  |
| Maximum operating voltage               | 1000 V AC  |
| Corrosion resistance                    | C4-M   |
| Maximum temperature for sealing gasket  | 80°C   |
| Maximum temperature for polyester paint | 125°C  |
| Mounting type                           | Wall mounting  |
| Mounting plate                          | 2mm galvanised sheet   |
| Colour                                  | RAL7035 grey   |
| Materials                               | Cold-rolled steel EN10130+A1, Injected polyurethane sealing gasket |
| Installation                            | Surface  |
| Type of door                            | Single plain door  |
| Locking                                 | 5-mm double-bit lock   |
| No. of locks                            | 2  |
| No. of hinges                           | 2  |
| Door reinforcement profiles             | 2  |
| Cable entry                             | Gland plate at bottom  |
| Sheet thickness Body                    | 1.5mm  |
| Sheet thickness Door                    | 1.5mm  |
| Inside usable space                     | (Height x Width x Depth) 550x550x179 mm                            |
| Wall fixing                             | (Height x Width) 560x560 mm  |
| Standards                               | UNE-EN 62208 / UNE-EN 61439-1-3 (as applicable)                    |
| Certificates                            | UL508A / Bureau Veritas  |



\* Picture only for representation purposes.

## MSB606020G

### MSB606020G

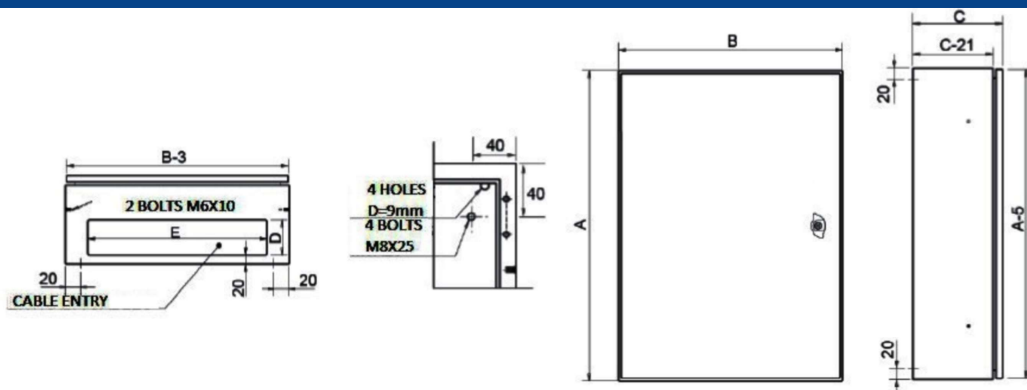

| A mm | B mm | C mm | D mm | E mm |
|------|------|------|------|------|
| 600  | 600  | 200  | 140  | 500  |