



FDM Series M12 Tubular Metal Photoelectric Sensors

FDM Series M12 (12mm) Tubular Metal - DC



Overview

The AchieVe FDM series M12 tubular photoelectric sensors offers DC Digital sensitivity adjustment by teach-in button or remote cable, and multifunction LED status indicator. This series offers diffuse reflection, polarized retroreflective, and through-beam models. Housings have an IP67 enclosure rating with complete protection against electrical damage.

Features

- Diffuse reflection, polarized retroreflective, and through-beam models available
- M12 quick-disconnect (purchase cable separately) or pigtail models
- Multifunction LED status indicator
- Red and infrared models
- Complete protection against electrical damages
- IP67 protection degree
- 3-year warranty



FDM3-0N-1A

FDM3-0N-1H

Please note: \$US prices shown

For current \$AUD visit www.directautomation.com.au



FDM Series M12 (12mm)Tubular Metal - DC									
Part Number	Price	Sensing Distance	Switching Frequency	Light Emission	Logic	Output Function	Connection Type *	Wiring	Drawing Link
Diffuse Reflection with Sensitivity Adjustment									
FDM3-0N-1A	\$41.00	100mm [3.9in]	1 kHz	Infrared LED (880nm)	NPN	Selectable Light-on/Dark-on	4-wire, 2m [6.5ft] Pigtail	Diagram 1	PDF
FDM3-0N-1H	\$41.00				NPN		4-pin M12 quick-disconnect	Diagram 1	PDF
FDM3-0P-1A	\$41.00				PNP		4-wire, 2m [6.5ft] Pigtail	Diagram 2	PDF
FDM3-0P-1H	\$41.00				PNP		4-pin M12 quick-disconnect	Diagram 2	PDF
FDM7-0N-1A	\$42.00	300mm [11.8in]			NPN		4-wire, 2m [6.5ft] Pigtail	Diagram 1	PDF
FDM7-0N-1H	\$42.00				NPN		4-pin M12 quick-disconnect	Diagram 1	PDF
FDM7-0P-1A	\$42.00				PNP		4-wire, 2m [6.5ft] Pigtail	Diagram 2	PDF
FDM7-0P-1H	\$42.00				PNP		4-pin M12 quick-disconnect	Diagram 2	PDF
Polarized Retroreflective Teach-in **									
FDMP-0N-1A	\$46.00	2m [6.5ft]	1 kHz	Visible red LED (660nm)	NPN	Selectable Light-on/Dark-on	4-wire, 2m [6.5ft] Pigtail	Diagram 3	PDF
FDMP-0N-1H	\$46.00				NPN		4-pin M12 quick-disconnect	Diagram 3	PDF
FDMP-0P-1A	\$46.00				PNP		4-wire, 2m [6.5ft] Pigtail	Diagram 4	PDF
FDMP-0P-1H	\$46.00				PNP		4-pin M12 quick-disconnect	Diagram 4	PDF
Through-beam Receiver ***									
FDMR-0N-1A	\$35.00	4m [13.1ft]	250 Hz	—	NPN	Selectable Light-on/Dark-on	4-wire, 2m [6.5ft] Pigtail	Diagram 5	PDF
FDMR-0N-1H	\$35.00			—	NPN		4-pin M12 quick-disconnect	Diagram 5	PDF
FDMR-0P-1A	\$35.00			—	PNP		4-wire, 2m [6.5ft] Pigtail	Diagram 6	PDF
FDMR-0P-1H	\$35.00			—	PNP		4-pin M12 quick-disconnect	Diagram 6	PDF
Through-beam Emitter - Potentiometer ***									
FDME-00-1A	\$28.50	4m [13.1ft]	—	Infrared LED (880nm)	—	—	4-wire, 2m [6.5ft] Pigtail	Diagram 7	PDF
FDME-00-1H	\$28.50		—		—	—	4-pin M12 quick-disconnect	Diagram 7	PDF

* Purchase cable separately for the M12 quick-disconnect models.

** Purchase reflector separately.

*** Purchase one receiver and one emitter for a complete set.



FDM Series M12 Tubular Metal Photoelectric Sensors

Wiring Diagrams

Diagram 1
4-Wire NPN Output
DM3/DM7




Diagram 2
4-Wire PNP Output
DM3/DM7




Diagram 3
4-Wire NPN Output
DMP

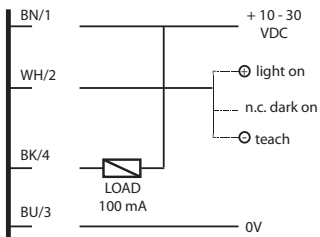


Diagram 4
4-Wire PNP Output
DMP




Diagram 5
4-Wire NPN Output
DMR




Diagram 6
4-Wire PNP Output
DMR







Diagram 7
Emitter
DME

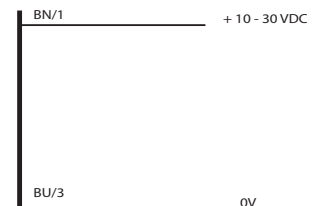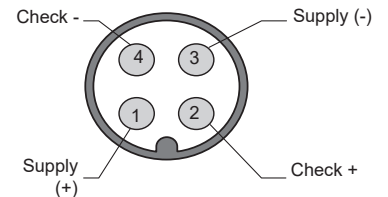

M12 Connector

Diffuse reflection polarized receiver

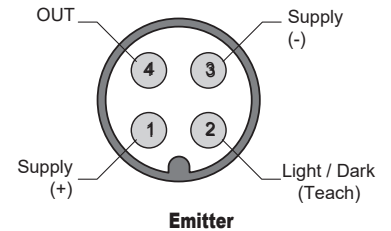



FDM Series M12 Tubular Metal Photoelectric Sensors




FDM Series M12 (12mm) Tubular Metal - DC Specifications

Sensor Type	Diffuse Reflection	Polarized Retroreflective Teach-in	Through-beam
Sensing Distance	FDM3: 100mm [3.9in] FDM7: 300mm [11.8in]	2.5m [8ft]	4m [13.1ft]
Thermal Drift	≤10% Sr		
Repeatability	≤5%		
Response Time Maximum	500 μs	500 μs	2 ms (Receiver only)
Output Types	NPN, PNP	NPN, PNP	NPN, PNP (Receiver only)
Operating Voltage	10–30 VDC		
Maximum Residual Ripple	10%		
Leakage Current	≤130 μA	≤130 μA	≤130 μA (Receiver only)
No Load Supply Current	30mA		
Maximum DC Output Voltage Drop	2V @ IL - 100 mA	2V @ IL - 100 mA	2V @ IL - 100 mA (Receiver only)
Operating (Load) Current	100 mA	100 mA	100 mA (Receiver only)
Short-circuit Protection	Yes		
Reverse Polarity Protection	Yes		
Impulsive Overvoltage Protection	Yes		
Delay to Availability	≤150 ms		
Operating Temperature	-25 to +70 °C [-13 to +158 °F]		
Protection Degree	IP67		
LED Indicators	Yellow (output status)		Emitter: Yellow (power on) Receiver: Yellow (output status)
Housing Material	Nickel plated brass / PBT cable exit		
Lens Material	PMMA - Poly (methyl methacrylate)		
Optical Location	Axial		
Shock/Vibration	Shock IEC 60068-2-27 / Vibration IEC 60068-2-6		
Ambient Light Immunity	15000 lux (incandescent lamp), <1000 lux (fluorescent lamp)		5000 lux (incandescent lamp) >3000 lux fluorescent lamp (Receiver only)
Tightening Torque	10 N•m [7.37 lb•ft] (mounted)		
Weight	52g [1.83 oz] Connector version / 16g [0.56 oz] Cable version		
IO-Link	N/A		
Connectors	PVC, 2m [6.5ft] 3-wire or 4-wire, 26 AWG M12 4-pin connector		
Agency Approvals	cULus File E328811, CE, UKCA		



FDM Series M12 Tubular Metal Photoelectric Sensors

Characteristic Curves FDM3 Models Diffuse Reflection

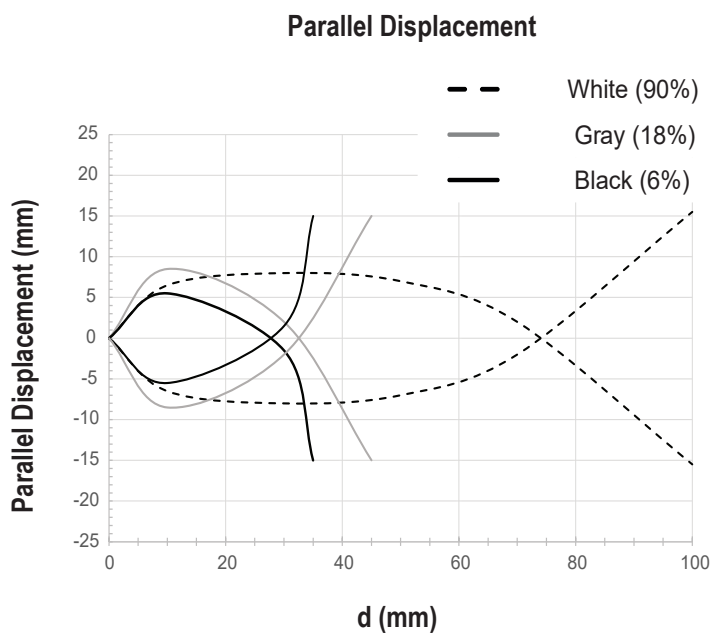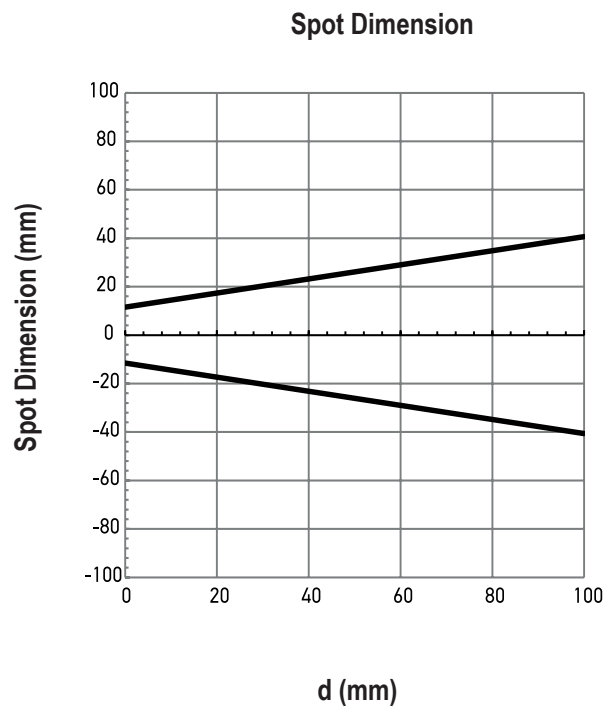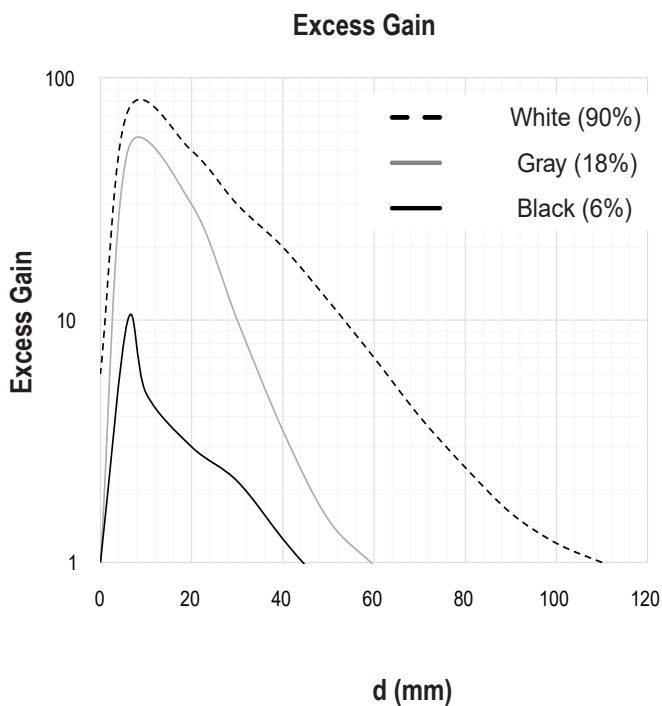





FDM Series M12 Tubular Metal Photoelectric Sensors

Characteristic Curves FDM7 Models Diffuse Reflection


Excess Gain

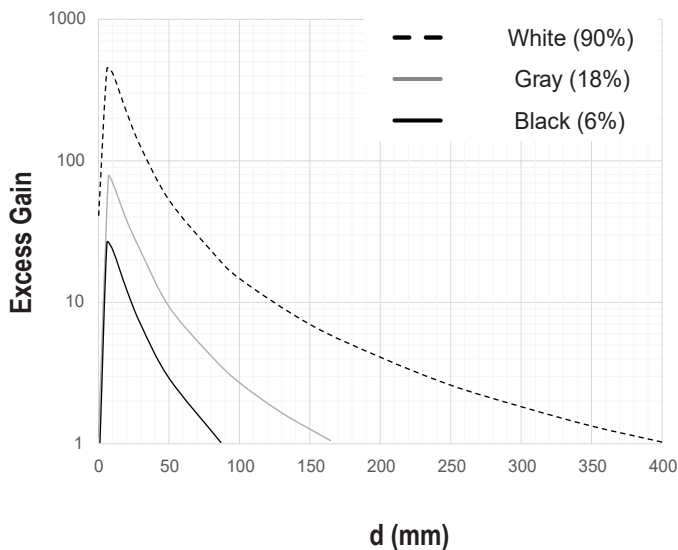

Spot Dimension

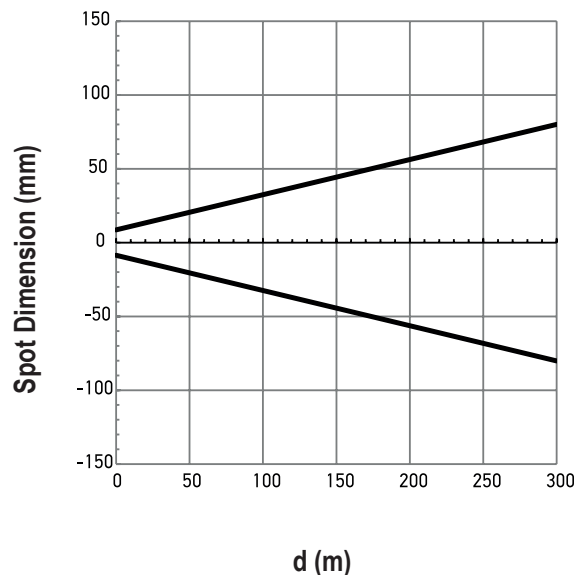

Parallel Displacement

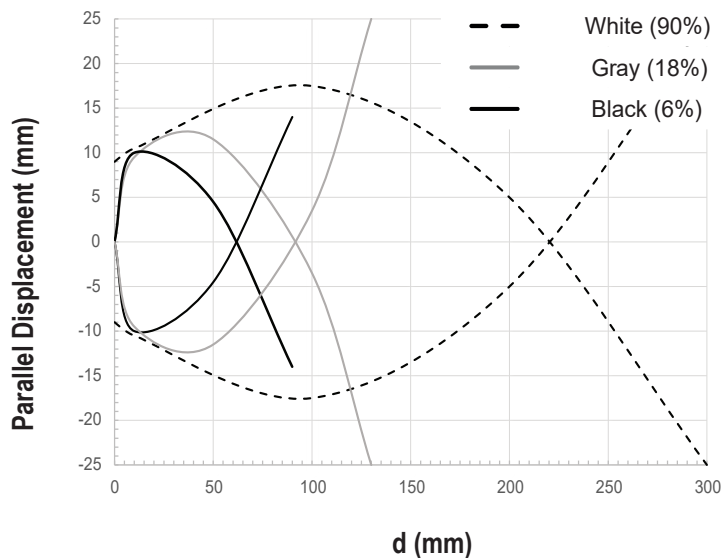





FDM Series M12 Tubular Metal Photoelectric Sensors

Characteristic Curves FDMP Models Polarized Retroreflective


Excess Gain (calculated with [RL110](#))

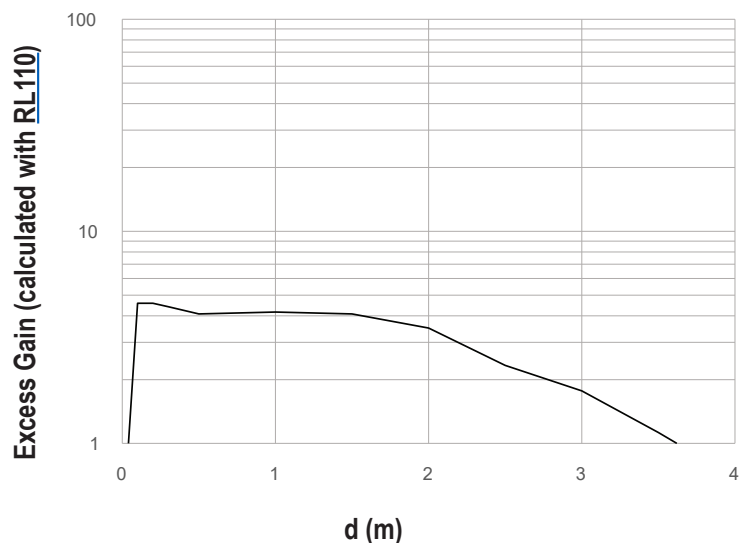

Spot Dimension

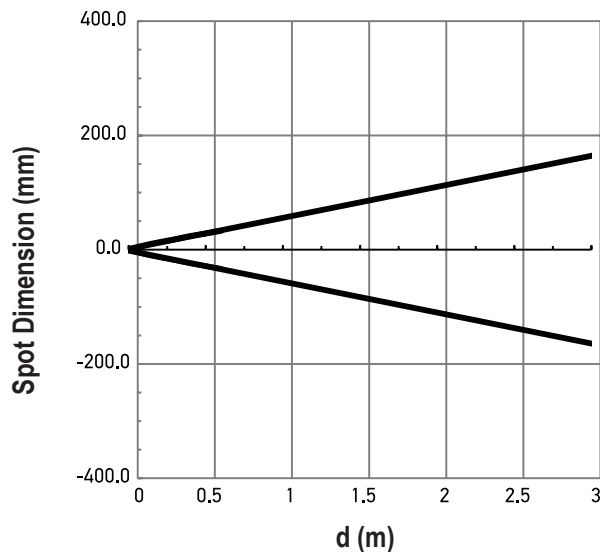

Parallel Displacement (calculated with [RL110](#))

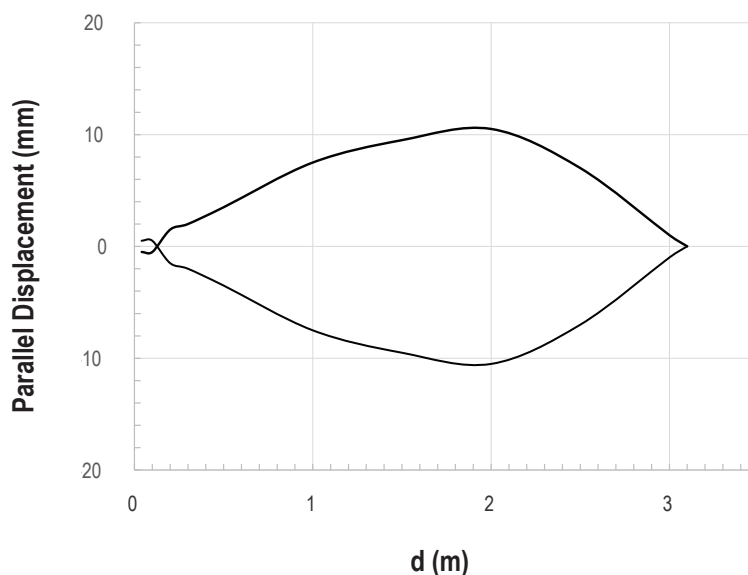





FDM Series M12 Tubular Metal Photoelectric Sensors

Characteristic Curves FDME Models Emitters and Receivers

Excess Gain

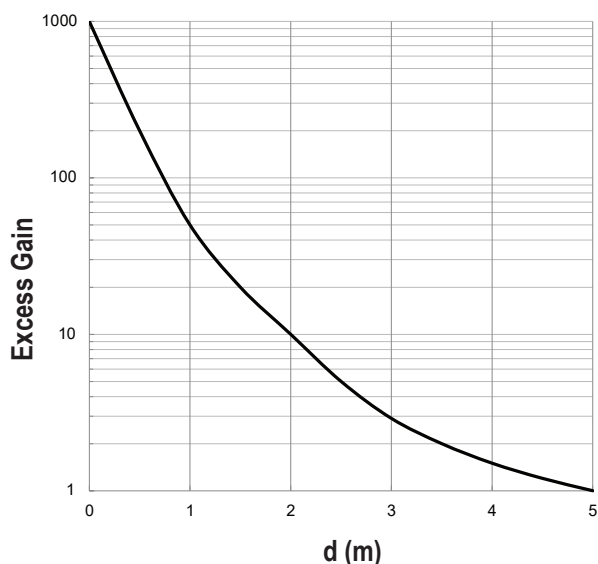

Spot Dimension

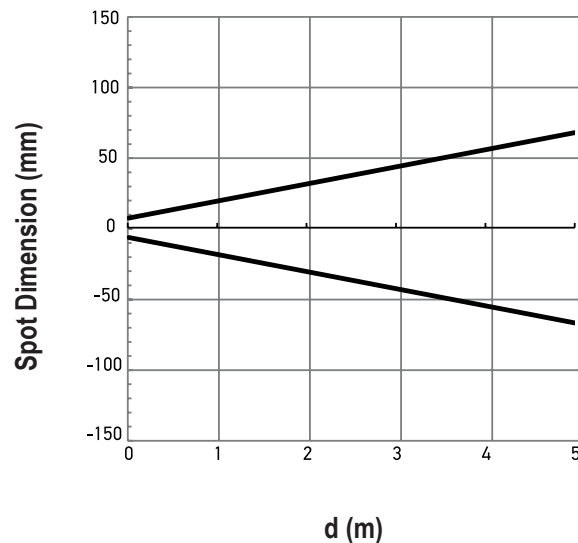

Parallel Displacement

